

Fox Canyon Groundwater Management Agency

5-Year GSP Evaluation for the LPVB: Numerical Modeling and Projects



Table of Contents

01 5-Year Evaluation Timeline

O2 Previous GSP Modeling

os Modeling for the 5-Year Evaluation

04 Opportunities for Engagement

Stakeholder Involvement

May 2024 - January 2025

Public Workshop

(GSP Amendments)

Public Workshop

5-Year Evaluation Timeline

August 2023

Kickoff Meeting

Modeling Approach Presented
to FCGMA Board

September October
2023 2023


Fina

- Plan Area and Background Review
- Model Scenario Development
- Current Groundwater Conditions
- Monitoring Network Review
- Actions Taken by FCGMA
- GSP Implementation Progress

LPVB PAC and TAC
Consultation

Finalize Modeling

- Assess Minimum Thresholds (MTs)
- Assess Measurable
 Objectives (MOs)
- Re-evaluateSustainable Yield
- Draft Reports

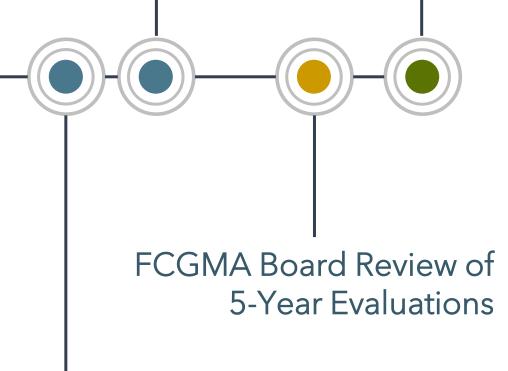

Submittal to

DWR

Stakeholder Involvement

May 2024 - January 2025

Public Workshop

(GSP Amendments)

August 2023

Kickoff Meeting

Modeling Approach Presented
to FCGMA Board
September

2023

Comparison of the comparison o

- Plan Area and Background Review
- Model Scenario Development
- Current Groundwater Conditions
- Monitoring Network Review
- Actions Taken by FCGMA
- GSP Implementation Progress



- Assess Minimum Thresholds (MTs)
- Assess Measurable
 Objectives (MOs)
- Re-evaluateSustainable Yield
- Draft Reports



Submittal to

DWR

Public Workshop

Background Information – Undesirable Results in the LPVB

Previous GSP Modeling

SUSTAINABILITY INDICATORS



Groundwater Elevation



Groundwater in Storage



Seawater Intrusion




Groundwater Quality



Land Subsidence



Interconnected Surface Water and Groundwater

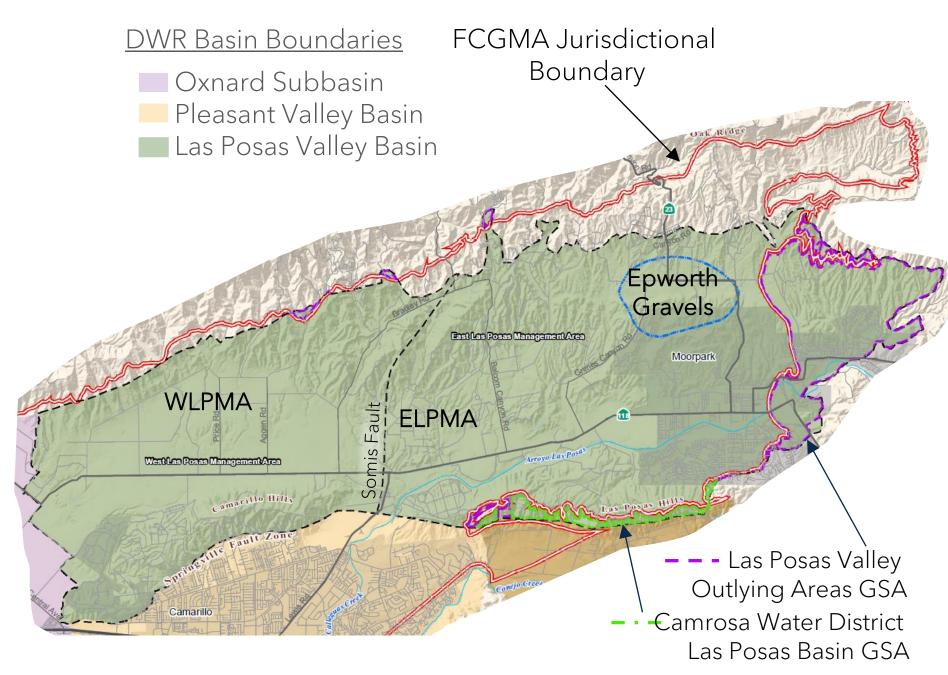

Background Information - GSP Modeling for the WLPMA

Previous GSP Modeling

Ventura Regional Groundwater Flow Model

- Numerical groundwater flow model developed and maintained by United Water Conservation District (UWCD 2018)
- Calibrated to groundwater elevations measured between 1985 and 2015
- Used to characterize groundwater budgets, forecast future groundwater conditions, and estimate the sustainable yield
- Independent peer reviews characterized model uncertainty and appropriate use for the GSP

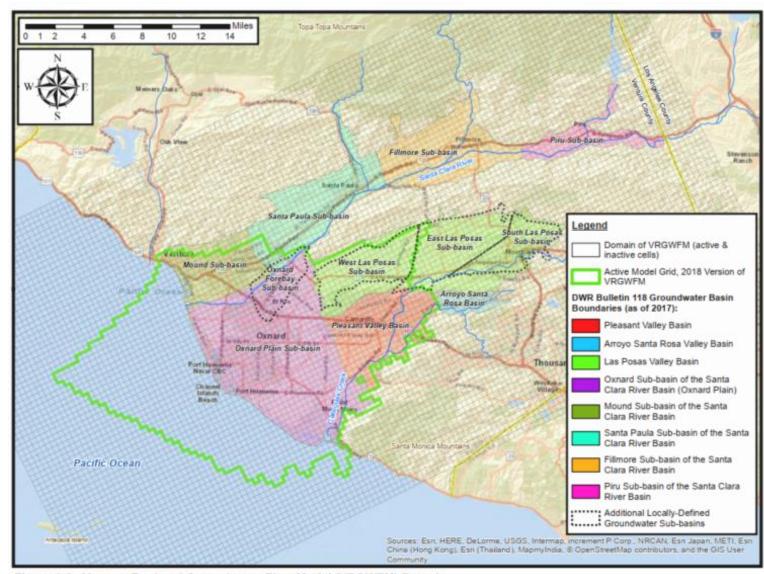


Figure 1-2. Ventura Regional Groundwater Flow Model (VRGWFM) Domain


UWCD (United Water Conservation District). 2018. <u>Ventura</u> Regional Groundwater Flow Model and Updated Hydrogeologic Conceptual Model: Oxnard Plain, Oxnard Forebay, Pleasant Valley, West Las Posas, and Mound Groundwater Basins. Open-File Report 2018-02. July 2018.

Background Information - GSP Modeling for the ELPMA

Previous GSP Modeling

East Las Posas Model

- Numerical groundwater flow model developed by Calleguas Municipal Water District (CMWD 2018)
- Calibrated to groundwater elevations measured between 1970 and 2015
- Used to characterize groundwater budgets, forecast future groundwater conditions, and estimate the sustainable yield
- Independent peer reviews characterized model uncertainty and appropriate use for the GSP

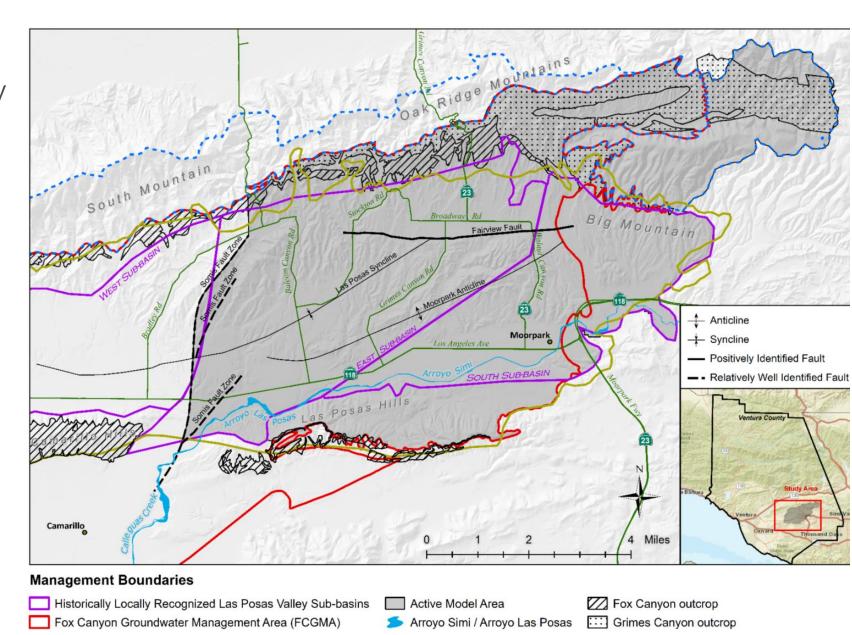

CMWD (Calleguas Municipal Water District). 2018. Groundwater Flow Model of the East and South Las Posas Sub-Basins. Prepared by Intera Geoscience and Engineering Solutions. January 2018.

Background Information – GSP Modeling


Previous GSP Modeling


GSP Modeling Scenarios

| | Groundwater Extractions (Acre-Feet per Year [AFY]) | |
|-------------------------------|---|--------|
| Model Scenario | WLPMA | ELPMA |
| Future Baseline | 14,000 | 22,000 |
| Future Baseline With Projects | 12,000 | 22,000 |
| Reduction With Projects | 10,000 | 20,000 |
| Reduction Without Projects 1 | 11,000 | 17,000 |
| Reduction Without Projects 2 | 11,000 | 19,000 |
| Reduction Without Projects 3 | 14,000 | - |




| | Sustainable Yield (AFY) | |
|-----------------|-------------------------|-------------|
| Management Area | Lower Range | Upper Range |
| WLPMA | 11,300 | 13,700 |
| ELPMA | 15,500 | 20,100 |
| Epworth Gravels | 1,300 | 1,340 |
| Total | 26,800 | 33,800 |

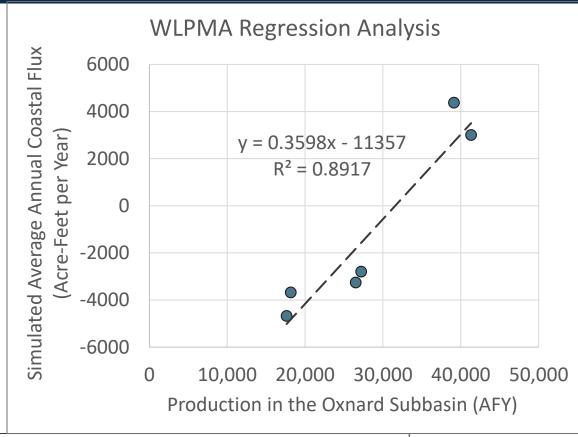

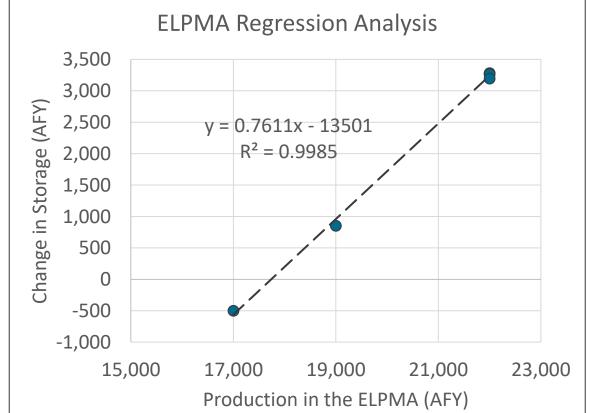

Las Posas Valley Basin Select Hydrographs

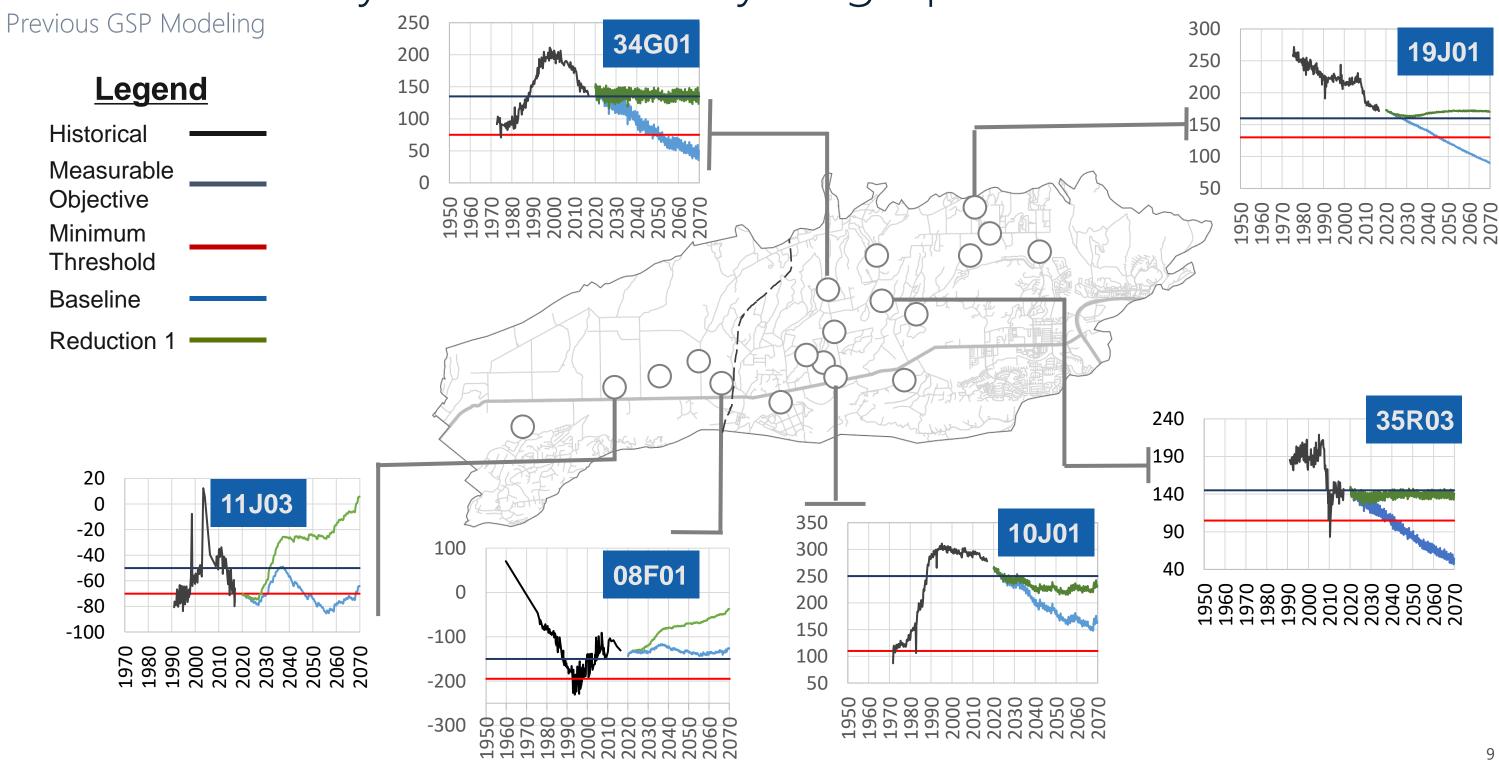

Modeling for the LPVB 5-Year GSP Evaluations



Update Numerical Model

- Evaluate the numerical model's ability to simulate current conditions
- Integrate newly collected / available data to improve predictions



Update Model Scenarios

- Incorporate new and updated project information
- Update hydrology
- Forecast groundwater conditions through the end of water year 2069



Re-evaluate key metrics

- Directly estimate sustainable yield under different future basin management scenarios
- Re-evaluate the minimum thresholds, measurable objectives, and interim milestones

Numerical Model Update for the WLPMA

Modeling for the 5-Year GSP Evaluation

Ventura Regional Groundwater Flow Model

- Numerical groundwater flow model developed and maintained by United Water Conservation District
- Updates since adoption of the GSP:
 - Expanded to encompass the Santa Paula, Filmore, and Piru Basins
 - Revised stratigraphic layering along the coast, near
 Port Hueneme and Point Mugu, based on additional geologic data
 - Updated coastal boundary conditions to better simulate groundwater elevations along the coastline
- Numerical model extended through September 30, 2022

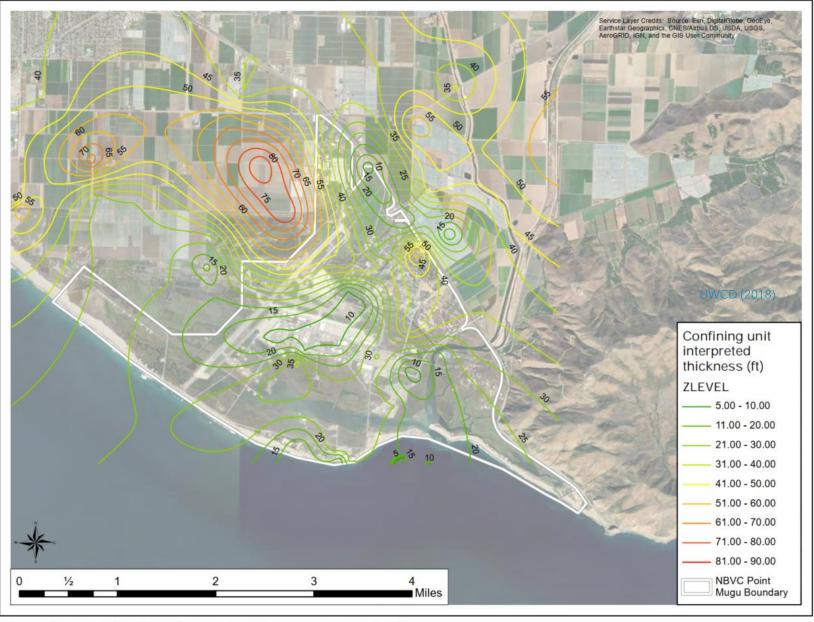


Figure 14. Confining Unit (Layer 2) thickness contours (feet)


UWCD (United Water Conservation District). 2021. Geologic Refinements Near Naval Base Ventura County Point Mugu, Ca. Technical Memorandum 2021-02. September 2021.

Numerical Model Update for the ELPMA

Modeling for the 5-Year GSP Evaluation


East Las Posas Model

- Numerical model provided to FCGMA by CMWD for 5-Year GSP Evaluation
- Numerical model extended through September 30, 2022, to validate predictive capabilities
- East Las Posas model was not revised as part of the 5-year GSP Evaluation

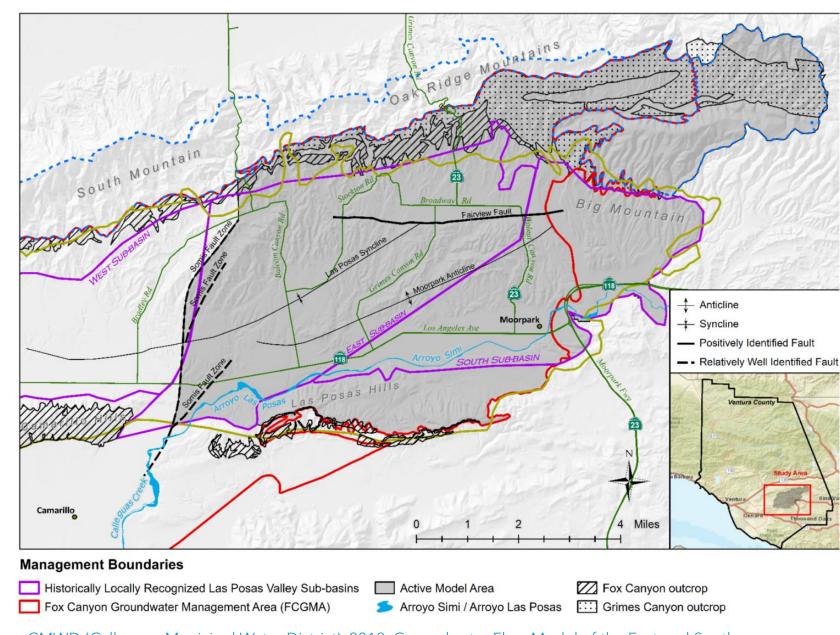

CMWD (Calleguas Municipal Water District). 2018. Groundwater Flow Model of the East and South Las Posas Sub-Basins. Prepared by Intera Geoscience and Engineering Solutions. January 2018.

Las Posas Valley Basin Select Hydrographs Through WY 2022

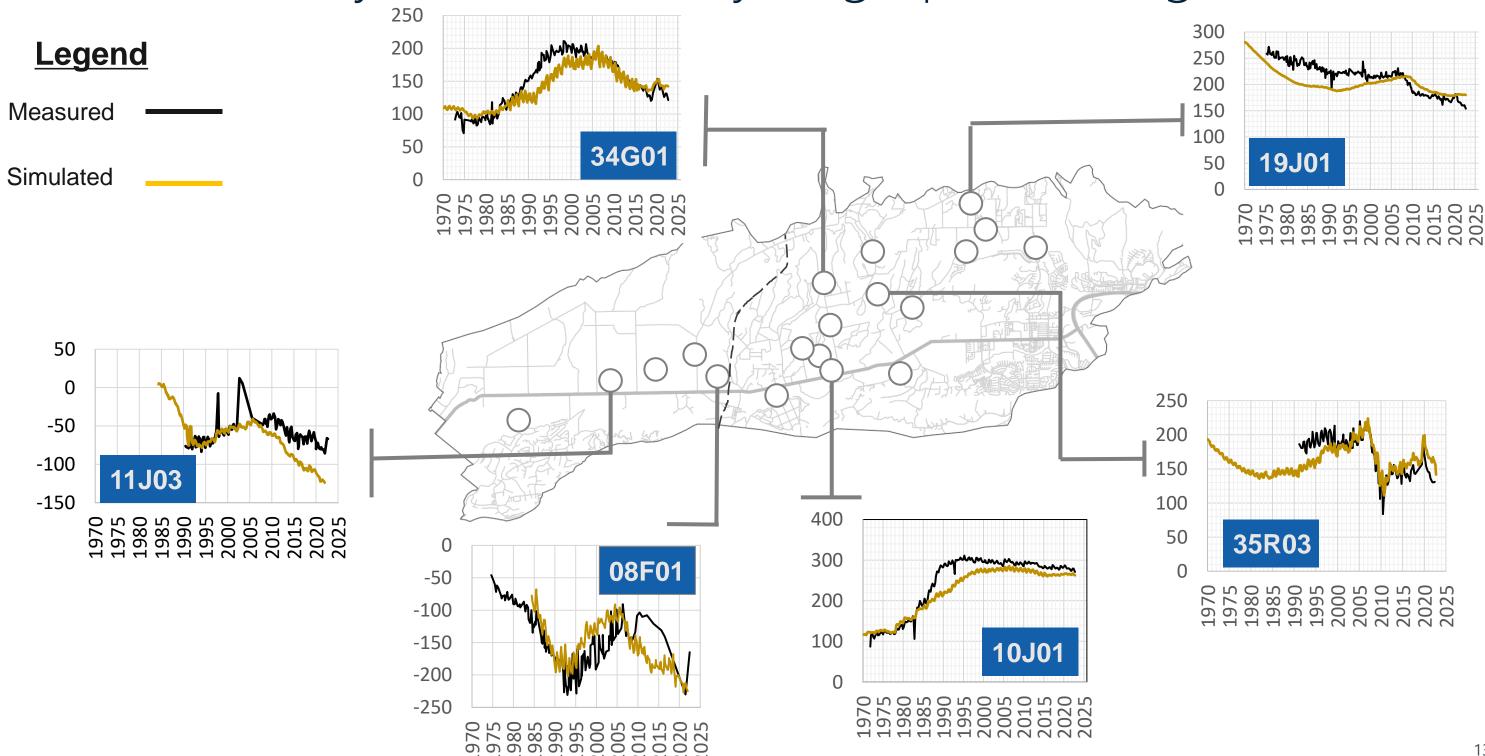

Updating the GSP Modeling Scenarios

Modeling for the 5-Year GSP Evaluation



Future Baseline

Updated pumping and expanded suite of projects

- Reflects recent pumping trends
- Includes projects that are currently funded and under construction in the LPVB and OPV



No New Projects

Sustainable pumping rate

 Includes projects currently funded and under construction in the LPVB and OPV



Projects

Integrates Management Actions and New Projects

- Adds future projects that are consistent with the Judgment and likely to be implemented in the LPVB and OPV
- Evaluates the impacts of demand reduction through voluntary temporary fallowing



Projects With EBB

Shifts the management framework

- Operation of UWCDs Extraction Barrier Brackish (EBB) water project
- Only applicable for WLPMA

Updating the GSP Modeling Scenarios: Time Period and Hydrology


Modeling for the 5-Year GSP Evaluation

What was done for the GSP?

- Calendar Year 2020 through Calendar Year 2069
- 1930 1979 Hydrology, adjusted by DWR's 2070 climate change factors

What is being simulated for the 5-year evaluation?

- Water Year 2023 through Water Year 2069
- 1933 1979 Hydrology, adjusted by DWR's 2070 climate change factors
 - 1933 replaced with 1978 to reflect the wet 2023 water year conditions

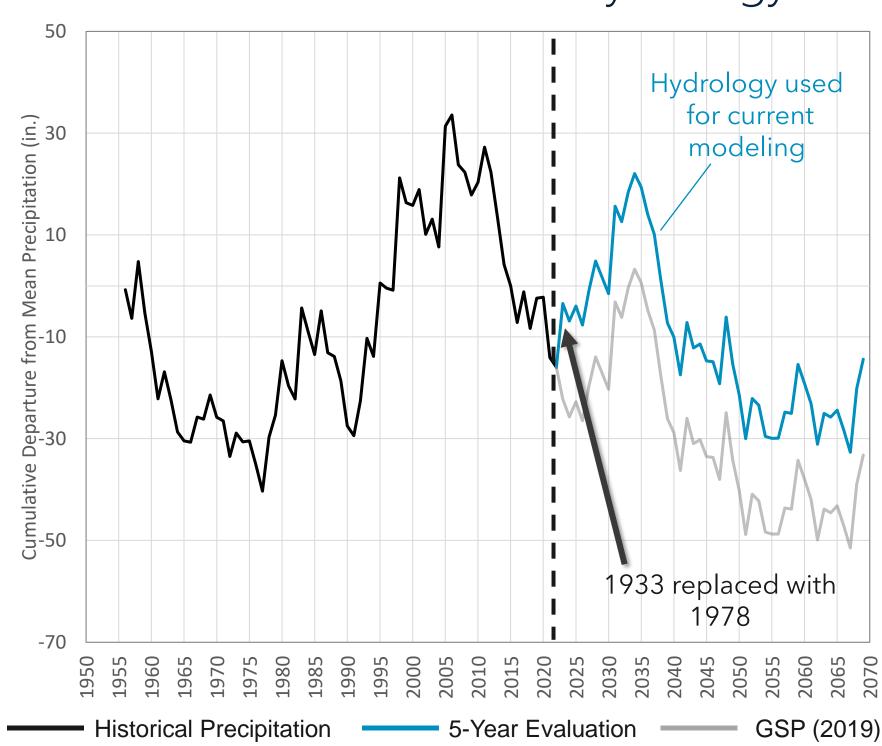

Baseline Model Scenario: Pumping


Modeling for the 5-Year GSP Evaluation

What was done for the GSP?

 Pumping held constant at average 2015-2017 rates

What is being simulated for the 5-year evaluation?

- Pumping held constant at average 2016-2022 rates (37,300 AFY)
- Approximately equal to the 2015-2017 rates (37,500 AFY)
- Consistent with updated baseline rates for the OPV

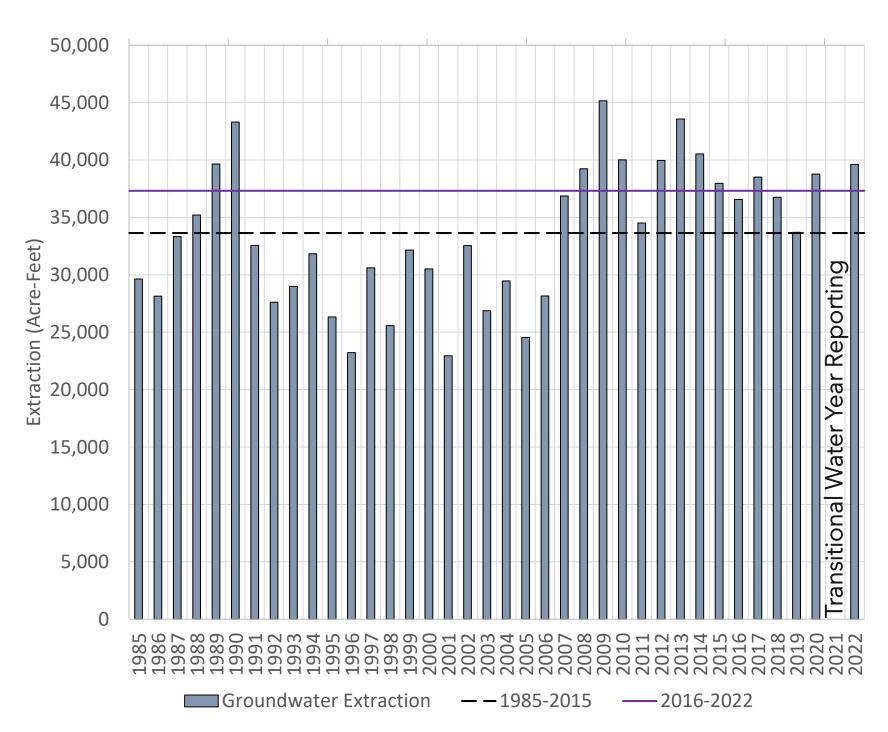

AFY = Acre-Feet per Year

Baseline Model Scenario

Modeling for the 5-Year GSP Evaluation

Projects simulated in the GSP:

- Conejo Creek Project
- North Pleasant Valley Desalter Project
- · AWPF Deliveries for AG

Change in projected water supply from GSP Baseline

 Approximately 3,600 AFY of recharge from Arroyo Las Posas

New Baseline Projects

| Project Name | Project Proponent | Basin | Anticipated Water Supply (AFY) | Projected Offset Pumping Reduction (AFY) |
|--|----------------------|-------|--------------------------------------|--|
| SVWQCP Discharges to Arroyo Las Posas | - | LPVB | 3,600 | 0 |
| Ferro-Rose Recharge Basin | UWCD | OPV* | 2,500 | Variable |
| Supplemental SWP purchase | UWCD | OPV* | 6,000 | Variable |
| Camarillo Recycled Water Deliveries to PVCWD | City of Camarillo | OPV* | 1,300 | 1,300 |
| Laguna road recycled water interconnect | UWCD | OPV* | 0 – 1,500 | 0 |

^{*}Included because these projects impact water levels in the WLPMA


Las Posas Valley Basin Select Hydrographs

5-Year Evaluation Baseline **Simulated Groundwater Elevations**

Groundwater elevations in 9 of the 20 key wells are forecasted to be below the minimum thresholds established in the GSP

Comparison to GSP Baseline Scenario

- ELPMA groundwater elevations are up to 90 feet higher than the baseline results from the GSP
- WLPMA groundwater elevations are up to 15 feet higher than the baseline results from the GSP

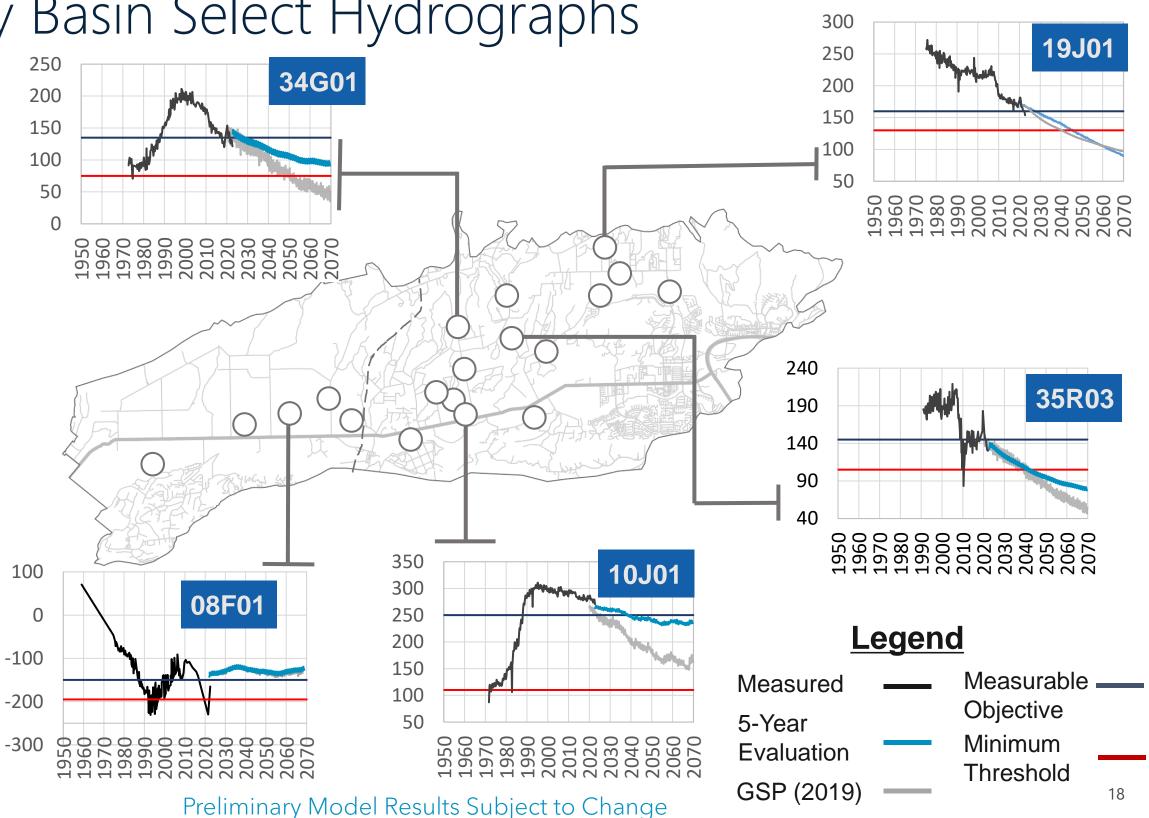

Baseline Model Scenario: Preliminary Results Summary

Modeling for the 5-Year GSP Evaluation

Simulated Coastal Flux

- Landward migration of the 2015 saline water impact front continues after 2040
- 50% reduction in estimated coastal flux into the UAS compared to the GSP Baseline
 - 1,600 AFY south of Port Hueneme
- 5% reduction in estimated coastal flux to the LAS compared to the GSP Baseline
 - 3,200 AFY south of Port Hueneme

Simulated Change in Storage

- Groundwater in storage in the ELPMA declined at a 33% lower rate than the GSP Baseline
 - · -2,200 AFY in the ELPMA
 - Groundwater elevations and storage exhibit chronic declines in northeastern ELPMA

Simulated Groundwater Elevations

- Groundwater elevations remain below the minimum thresholds established in the GSP in 9 of the 20 key wells in the LPVB
- · Baseline conditions are not sustainable

No New Projects Scenario

Modeling for the 5-Year GSP Evaluation

- Projects, simulation period, and hydrology are consistent with the Baseline Scenario
- Groundwater extractions will be incrementally adjusted until:

WLPMA

- No net seawater intrusion in Oxnard

ELPMA

- No net decline in groundwater in storage
- Improves on previous estimate of sustainable yield through direct simulation rather than regression

Projects Scenario

Modeling for the 5-Year GSP Evaluation

Projects and Management Actions simulated in the GSP:

- · Arundo Removal
- In-Lieu deliveries to WLPMA

Sustainable Yield:

 Iterative adjustments to simulate pumping at the sustainable yield

OPV Projects:

- New projects in the OPV include the Freeman Expansion
- This project will influence groundwater elevations in the WLPMA

New Future Projects

| | Project Name | Project Proponent | Anticipated Water Supply (AFY) | Projected Offset Pumping Reduction (AFY) | |
|---|---|--|--------------------------------------|--|--|
| • | ZMWC Infrastructure Improvement | ZMWC | 0 | 500 | |
| | Importing of surplus water | | | | |
| | Arroyo Las Posas storm water capture and recharge | <u>Unknown</u> | | | |
| | Desalter construction | | | | |
| | Recycled water delivery pipeline | Will be scoped, designed, and evaluated as part the Basin Optimization Plan. | | | |
| | New or modified in lieu delivery infrastructure | | | | |
| | Using CMWD facilities for replenishment | | | | |

Projects with EBB Scenario

Modeling for the 5-Year GSP Evaluation


EBB Design:

- Extraction of 10,000 AFY near Point Mugu
- 5,000 AFY of treated product water
 - 1,500 AFY delivered to Navy
 - 3,500 AFY delivered to AG operators in the OPV

Sustainable Yield and Management Criteria

- Revised method for tracking landward seawater intrusion
- Revised Minimum thresholds and measurable objective

| Project Name | Project Propon ent | Anticipated Water Supply (Acre-Feet per Year) | Projected Offset Pumping Reduction |
|---|--------------------------|--|---|
| Extraction Barrier Brackish Water Project | UWCD | 5,000 | 3,500 – 5,000 |

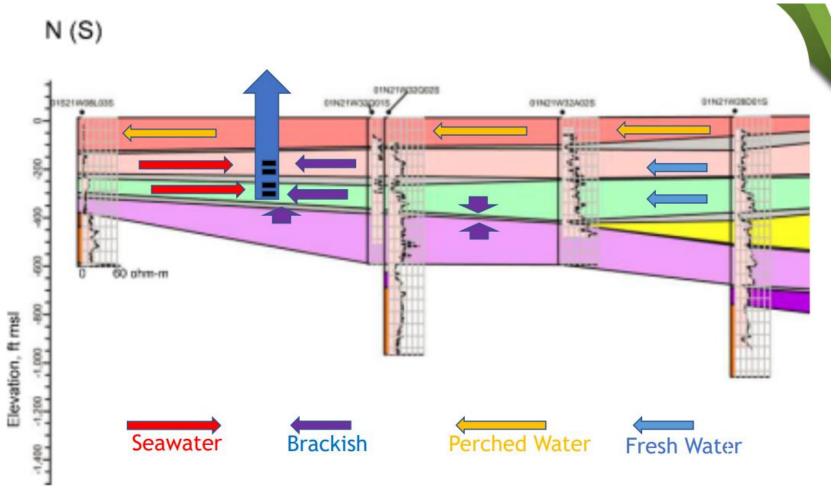

https://www.unitedwater.org/wp-content/uploads/2022/10/UWCD_WSSIII-EBB-Water-Treatment-Project-2022-10-19.pdf

Updating the GSP Modeling Scenarios

Modeling for the 5-Year GSP Evaluation



Future Baseline

Status

Preliminary Simulations
 Complete

Results

- Projected future seawater intrusion into Oxnard
- Projected future decline in groundwater in storage in the LPVB

No New Projects

Status

Simulations are underway

Results

 Preliminary results anticipated end of April/May 2024

Projects

Status

 Simulations are under development

Results

Preliminary results anticipated May 2024

Projects With EBB

Status

 Simulations have not started

Results

 Preliminary results anticipated June 2024

Stakeholder Involvement

5-Year Evaluation Timeline

August 2023

Kickoff Meeting

Modeling Approach Presented

to FCGMA Board

September October

2023 2023

- Plan Area and Background Review
- Model Scenario Development
- Current Groundwater Conditions
- Monitoring Network Review
- Actions Taken by FCGMA
- GSP Implementation Progress

May 2024 - January 2025

April 2024
Public Workshops
(GSP Amendments)

LPVB PAC and TAC

Consultation

- Finalize Modeling
- Assess Minimum Thresholds (MTs)
- Assess Measurable Objectives (MOs)
- Re-evaluateSustainable Yield
- Draft Reports

FCGMA Board Review of 5-Year Evaluations

Submittal to

DWR

Public Workshop

Questions & Answers